LINX SL3
LASER CODER

Affordable. Robust. Simple.

The Linx SL3 Laser Coder is affordable, enabled by a single laser coding unit with flexible configurations to meet your needs.

Simple to install and easy to maintain, the Linx SL3 provides an ideal marking solution onto a wide range of products.

With its IP54 rated enclosure and proven laser technology, the Linx SL3 operates reliably in manufacturing environments, maximizing production output.

Affordable

- **Compact, complete laser coder in a single unit** that meets your coding needs at an affordable price
- **Operates without any consumables** to minimise your running costs.
- **Flexible user interface** options to control your laser.

Robust

- **IP54 stainless steel and anodised aluminium enclosure** to withstand your manufacturing environment.
- **Established and proven laser tube and marking head technology** provide reliability and confidence.
- **Operates without interconnections** improving laser reliability through eliminating possibilities of interconnection failure or damage.

Simple

- **Multiple mounting positions and orientations** support simple and compact installations.
- **Single unit installation** reduces production line space usage and installation time.
- **Easy and minimum maintenance** increases production time and reduces running costs

@codeplus

LINE

"Your reliable partner in coding"
CODE PLUS

LINX

Linx SL3

TOP ELEVATION

SIDE ELEVATION

FRONT ELEVATION

Technical Specifications

LASER DETAILS

- Laser type: sealed RF excited CO2
- Max. Nominal Laser output (10.6µm): 30W
- Laser wave length: 10.6µm (Standard), 9.3µm (PET), 10.2µm (Laminated Plastic, card)
- Laser tube warranty: 2 years

PERFORMANCE

- Maximum Line Speed: 360 m/min *
- Maximum marking speed [2mm characters/s]: 1300 m/min *
- Number of lines of text: Only limited by character size and marking field size
- Character height: Up to marking field size
- Print rotation [°]: 0 to 360

LASER HEAD & LENS OPTIONS

- Marking ellipse [mm]: 51 x 80; 76 x 120; 102 x 160
- Marking distance [mm]: 92; 141; 190
- Head mounting options: down (90°) or straight (0°)
- Pilot Laser: available as standard
- Focus Finder: available as standard

PHYSICAL CHARACTERISTICS

- Mounting: On 3 sides of laser
- Material: Anodised aluminium base, stainless steel covers, anodised aluminium end-caps
- Conduit Length: Combined marking unit and supply unit; no conduit required
- User interface: Optional 10.1" colour LCD touch screen, stainless steel enclosure
- Protection Class: IP54
- Cooling: Internal Fan Cooling
- Supply voltage / frequency: 100 - 120 Volts or 200 - 240 Volts; 50/60Hz
- Size [mm]: 161 W x 200 H x 656 L
- Weight [kg]: 21

LINXVISION® SOFTWARE

- Easy access operator toolbar: Date & time offset, variable text, rotate / flip / mirror / curve / scale message, adjust laser intensity
- Operating languages: Brazilian Portuguese, Chinese Simplified, Chinese Traditional, English, Japanese, Korean, Russian, Spanish, Thai, Vietnamese, Arabic.
- Password protection: Multiple protection levels and access rights (user defined)

CODING AND PROGRAMMING FACILITIES

- Code options: Date, time, static text, variable text, serial numbers, shift codes, increment/ decrement (batch count), 1D/2D barcodes, graphics and logos, Julian date, Custom date and time formats, 2D codes including DotCode
- Linear, circular, angular, reverse, rotate.
- Character type: Vector fonts
- Standard system vector fonts: OTF, TTF, PFA, PFB and SVG fonts
- Optional customized fonts: Arabic, Bengali, Chinese, Japanese, Thai, Vietnamese
- Bar codes: BC25, BC25I, BC39, BC39E, BC93, GSI-128, PZN, EAN 8, EAN 13, BC128, EAN 128, POSTNET, SCC14, UPC_A, UPC_E, RSS14TR, RSS14ST, RSS14STO, RSSLIM, RSSLIMGP, RSSEXP, IMB, PZN
- 2D Datamatrix codes: ECC000, ECC050, ECC080, ECC100, ECC140, ECC200, ECC PLAIN, QR, Aztec, DOTCODE,MICRO QR, PDF417

ENVIRONMENTAL DETAILS

- Ambient operating temperature: 5 to 40°C (70% duty cycle at maximum temperature)
- Automatic overheat detection: yes
- Storage temperature: -10 to 70°C
- Humidity range: maximum of 90% (relative, non-condensing)

INTERFACING

- Interface ports: 1 detector, 1 encoder, 1 safety connector combining interlock** and shutterlock**, 1 Ethernet RJ45, 1 LinxVision Touch Screen, 2 USB host (via optional user interface)
- Input/Output options: Job select input (PCBA direct connect via gland), Start / Stop input (IP54 connector), Marking output, Laser ready output, Ready to mark output, Shutter lock closed
- Shutterlock: available as standard**
- Interlock: available as standard**

**No performance level at standard. Additional optional safety box and components required to achieve a PL

REGULATORY APPROVALS

• CE • RoHS

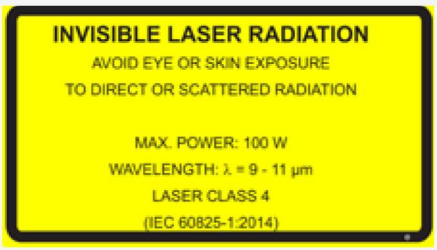

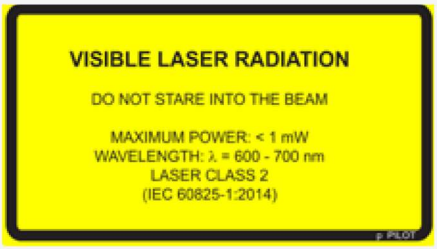

*Line and marking speeds are application dependant

"Your reliable partner in coding" CODE PLUS

@codeplus

Code Plus Co.,Ltd.
235 Panya Indra Rd, Bang Chan, Khlong Sam Wa, Bangkok 10510
Tel: 02-570-2721, Fax: 02-570-2722, Email: admin@codeplus.co.th
www.codeplus.co.th

For more information, contact Linx Printing Technologies Ltd, Linx House, 8 Stocks Bridge Way, Compass Point Business Park, St Ives, Cambs, PE27 5JL, UK.

Telephone +44 (0)1480 302100 **Email** sales@linx.co.uk **Website** www.linxglobal.com

Linx, LinxVision and VisiCode are registered trademarks of Linx Printing Technologies Ltd.
© Linx Printing Technologies Ltd 2021

MP41262