

### Print & Apply Systems

- ✓ Automatic Print & Apply Labeling Systems, for any group packaging (cases, packs, trays, bags, etc.).
- ✓ No compressed air required
- ✓ 100% Electric
- ✓ Speed up to 180 labels/min
- ✓ Main frame made in anodized aluminium
- ✓ Technologically designed to meet the most exigent requirements and highest production volumes
- ✓ Compact, solid, reliable and compatible with any OEM print engine on the market
- ✓ Meets GS1 global standards of codification and traceability with ANSI barcode printing and grade A and B in GTIN codes

# APL 3500



## Print & Apply Systems



APL **3500E Series**, have been developed using electric technology, avoiding the use of compressed air, being the most environment-friendly industrial systems in its category. In addition, it reduces the energetic consumption costs.

APL **3500E Series**, meets the most strict requirements in terms of reliability, robustness and compatibility with the industrial standards, established by GS1 International for packaging.

Its modular design allows the **3500E Series** to Print & Apply on the following positions:

- ✓ Top
- ✓ Side
- ✓ Corner

Technologically designed to meet the most exigent production line demands, on speed and capacity.

**3500E Series** can print and apply labels with variable data, at speed up to 180 cases/minute.

APL **3500E Series** of easy installation and integration into any production line. Wide connectivity range allows connect it to any automatic device on the line, manage and transmit data to or from any ERP, MES, WMS or DBMS using UBS Designer® message editor and UBS Labman® Software.

APL **3500E Series** meets the GS1 global standards for codification and traceability with ANSI barcode printing and grade A and B in GTIN codes.




# APL 3500 (All Electric)

*Print & Apply Systems  
Developed using  
electric technology*

## Technical Features

PRINT ENGINE	ZEBRA, HONEYWELL, SATO...
PRINTING RESOLUTION	From 203 up to 600 dpi (depending on print engine and printing speed)
LABEL ROLL	Max. diameter.: up to 350 mm / 11.8"
RIBBON ROLL	Max. Length: 600 m / 1.968 ft (depending on print engine specifications)
LABELING SPEED	Up to 180 labels / min (depending on print engine, packaging and production line characteristics)
INTERFACE	Ethernet, USB, Wifi, RS232 (depending on print engine specifications)
DISPLAY	3.5" Touch Screen
POWER SUPPLY	110 / 240 VAC, 50 / 60 Hz
ENVIRONMENT	From + 5°C up to 40°C
HUMIDITY	Between 20% - 85% non-condensing

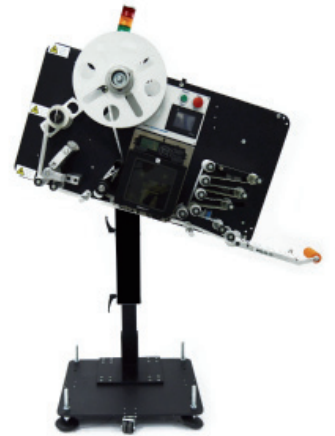

APL35E/170401



**United Barcode Systems**

Labeling, Coding & Marking

[www.ubscore.com](http://www.ubscore.com)

*The right choice*

